


IA/MP4 Tarjeta PCI con 4 puertos MiniPCI Integrados

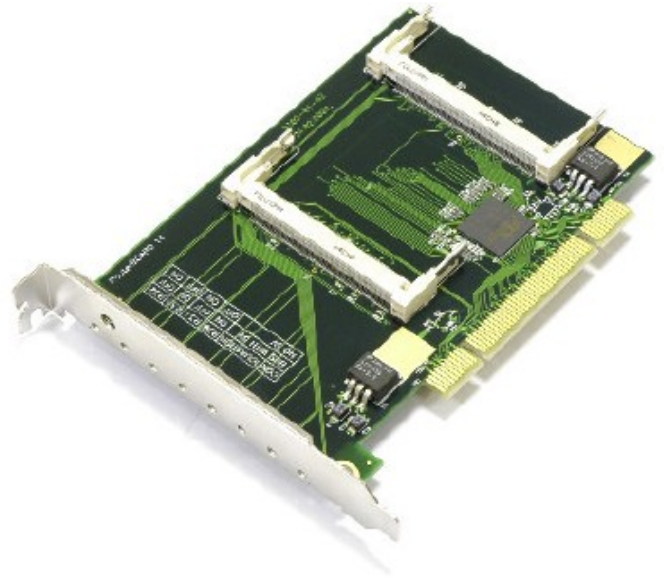

Specifications

Standards:	MiniPCI v1.0 standard compliant PCI v2.1 and v2.2 compliant transparent PCI bridge (no drivers needed)
Operation Voltage:	PCI 3.3v and 5v support optional - 3.3v only support (factory option - RouterBOARD 14-3.3)
Input Power:	Up to 2.5w of 3.3v power supplied to Mini PCI card
LED:	Two LEDs connected to each MiniPCI (according to standards)
Operation Temp.:	0o C to 70o C (32oF to 158oF)
Storage Temp.:	-20o C to 80oC (-4oF to 176oF)
Humidity Range:	0% to 90%
Mounting:	Mounting for optional tin shield for two slots
Dimensions:	9,6 x 14cm (3,78 x 5,51in)

Distribuidor autorizado:

Mikrotik-México
info@index.com.mx
www.mikrotik-mexico.com.mx

Ignacio Zaragoza 444 Nte. Despacho 511
Edificio San Isidro Col. Centro. Los Mochis Sinaloa.
Tel./Fax.01(668)812-52-12, 01-800-716-0708